

Call us for personal Demonstration

**PolyStar 9900
Dual Servo Powered
Automatic Wicketer**

Features

- Speeds up to 400 bags/min.
- Touch Screen to activate all major machine functions and provide bag making recipes.
- Patented servo driven index conveyor.
- Six working conveyor stations to ease delivery operations with no tool adjustable stacking pins.



Vacuum Arms 14", 16", 20" and 26" Available

- New Design of paddle rope belt section for easy setup.
- Common base frame construction allows for installation and bag production within hours.
- Electronic web sensors.
- Patented "EDC" Sealing System.



**Executive Offices
64-20 Admiral Avenue
Middle Village, New York 11379**

**Tel: 718-821-1115
Fax: 718-821-3838
Email: sales@roan.com**

Call us for personal Demonstration

PolyStar 9900 Dual Servo Powered Automatic Wicketer



Machine Specifications

ITEM		PS9900
Working Width	(711mm)	28"
Maximum Bag Width	(356mm)	15"*
Minimum Bag Width	(76mm)	3"
Maximum Bag Length	(711mm)	28"
Minimum Bag Length	(203mm)	8"
Maximum Roll Diameter	(610mm)/(914mm)	24"/36"
Speed (8" draw, .001" film)		375-400

* AVAILABLE UP TO 20"

FLOOR PLAN

ELECTRONIC SERVICE REQUIRED:

220/240 Volt Three Phase 60 Amp. Max.
50/60 Cycle In Addition Plant Ground
Should Be Used.

VACUUM TURBINE:


220/240 Volt Three Phase 40 Amp.
Max

WATER SUPPLY-STRIPPER:

Standard City Water Supply And Drain.

AIR SUPPLY:

80-110 PSI - 10-14 CFM

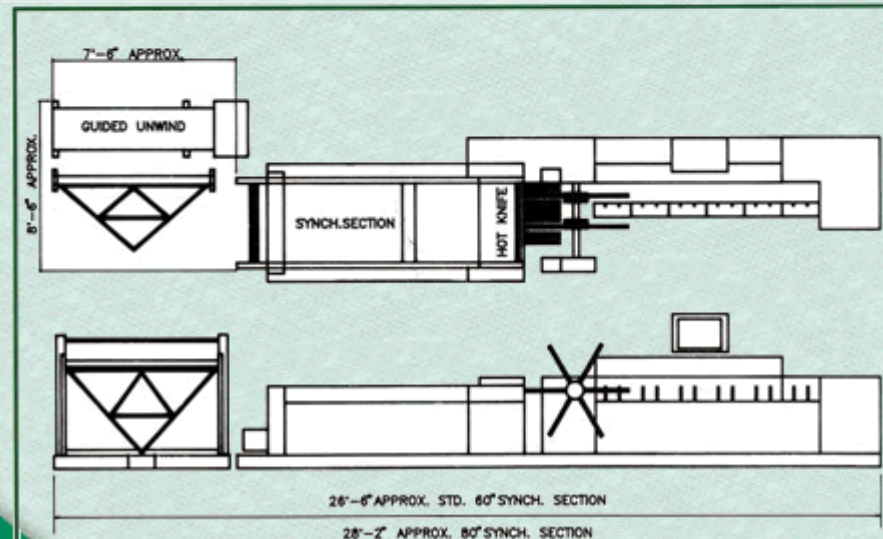

Executive Offices
64-20 Admiral Avenue
Middle Village, New York 11379

Tel: 718-821-1115
Fax: 718-821-3838
Email: sales@roan.com